

**WEDGTAP CONNECTORS FOR ACSR and AAAC
25mm² to 100mm²**



DESCRIPTION

Material

Body Heat-treated aluminium extrusion
Insert Aluminium die-casting

Weight

Small (WG-AS) 95grms.
Medium (WG-AM) 100grms

TOOLING				CARTRIDGE / BOOSTER			
TYPE		TAKE OFF CLIP		Prysmian		BURNDY	
Prysmian	BURNDY	Prysmian	BURNDY	INSTALL	REMOVE	INSTALL	REMOV
MP100	WTRB	MPA4	WTOCBR	YELLOW	GREEN	RED (WG-AS type) BLUE (WG-AM type)	RED

Cartridge Refs: -Green (WGCG)
-Yellow (WGCY)


Booster Refs: - Red (WPBRN)
- Blue (WPBBN)

ALUMINIUM WEDGTAP DETAILS


	CONDUCTOR (TAP)	CONDUCTOR (MAIN)									
		ACSR					AAAC				
mm ²	Code Name	Gopher 25(6/1)	Ferret 40(6/1)	Rabbit 50(6/1)	Racoon 75(6/1)	Dog 100(6/7)	Almond 25(7)	Fir 40(7)	Hazel 50(7)	Oak 100(7)	
ACSR 25	Gopher	WG30AS*	WG30AS*	WG29AS	WG1AM	WG1AM					
ACSR 40	Ferret		WG29AS	WG1AM	WG1AM	WG2AM					
ACSR 50	Rabbit			WG1AM	WG2AM	WG2AM					
ACSR 75	Racoon				WG2AM	WG3AM					
ACSR 100	Dog					WG3AM					
AAAC 25	Almond						WG30AS*	WG30AS*	WG29AS	WG1AM	
AAAC 40	Fir							WG29AS	WG1AM	WG2AM	
AAAC 50	Hazel								WG1AM	WG2AM	
AAAC 100	Oak									WG3AM	

Note: * These connectors have individual MAIN and TAP positions

SMALL (WGAS)

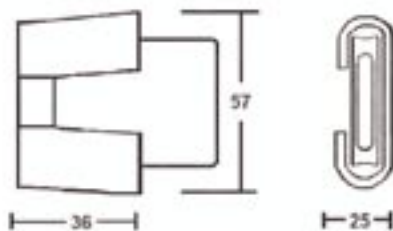

MEDIUM (WGAM)

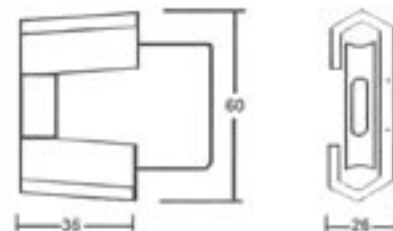

Formerly Pirelli Cables